


Description



Specification

Power supply	AC220V
Power consumption	≤2W
Temperature control	Start when the ambient temperature ≤5℃, Stop when the ambient temperature ≥13℃
Humidity control	Start when the ambient humidity ≥93%RH, Stop when the ambient humidity ≤80%RH
Control method	Heating
Output	5A AC250V(Resistive load)
Ambient operating temperature	-10℃~50℃(With no corrosive gas)
Ambient operating humidity	<85%(With no corrosive gas)
Dimension(mm)	48×48×94
Mounting(mm)	46×46
Installation	Flush mounting

Dimension and mounting(mm)

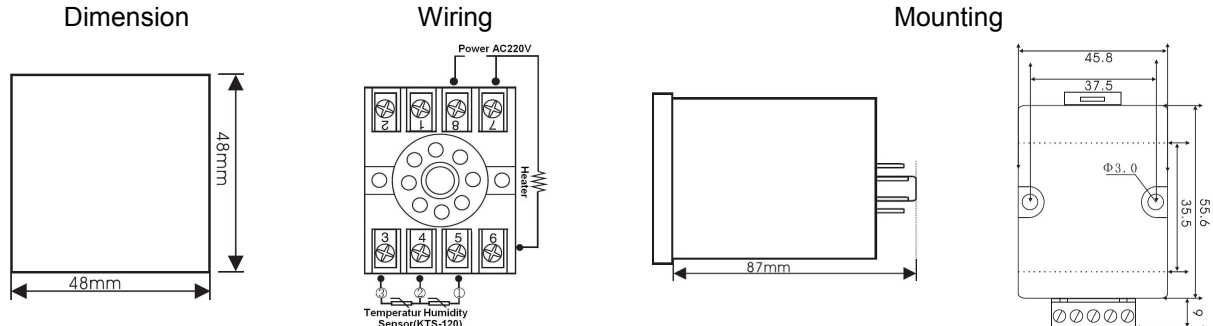

Dimension of the Temperature and Humidity sensor KTS-120(mm)

