


## Description





## Specification

Model	HH48-M	HH48-N	TDB-M	TDB-N
Setting	Potentiometer	Dial switch	Dial switch	Dial switch
Indicator	No	Digital display	Deviation indicator	Digital display
Adjustment	On-off switch or Time proportioning controller		Time proportioning controller	
Sensor	TC	TC	TC	TC
Display Accuracy	≤2.5%FS	≤1.0%FS	≤2.5%FS	≤1.0%FS
Power supply	AC220V ± 10% 50/60Hz			
Power consumption	≤2w			
Control sensitivity	≤0.75%FS			
Proportional control	Proportional band 3~6%, zero period 30s ± 10s			
Output	3A AC250V(Resistive load)			
Ambient conditions	-10℃ ~ +50℃, ≤85%RH(with no icing and frosting)			
Dimension(mm)	48×48×90	48×48×90	48×96×107	48×96×107
Mounting(mm)	45×45	45×45	45×92	45×92
Installation	Flush mounting or DIN Rail		Flush mounting	

## Dimension(mm)

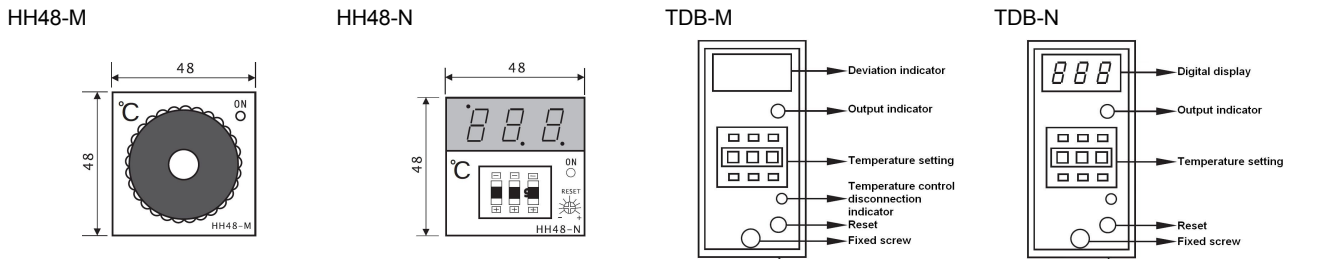

## Mounting



## Wiring

