



Description

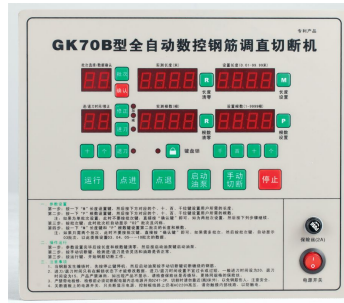

Specification


Rated Supply Voltage	AC12V 50/60Hz
Load voltage	AC220V 50/60Hz
Input Modes	Increment
Setting range	Length: 0.01m~99.99m Quantity: 1~9999 Feed time: 10ms~990ms Retract time: 10ms~990ms
Signal sampling	1mm× Value coefficient(9.999)
Input Signals	1.Limit switch counting(H--2, counting speed is 30 times/s) 2.PNP Rotary encoder(H--1, counting speed is 3000 times/s)
Output Modes	Relay output, don't connect Motor directly, for expand the capacity the AC220V contractor is necessary.
Memory Protection	10 years
Rated Load of the Contact	16A AC220V(Resistive)
Installation	Flush mounting

Wiring Diagram and Dimension(mm)

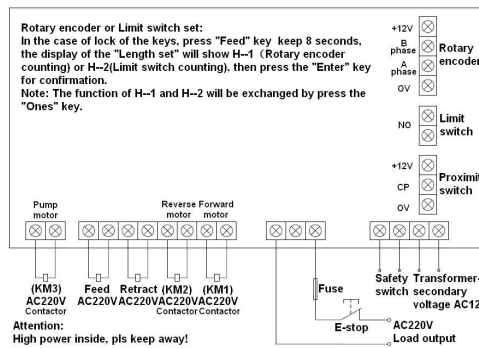


Input Signals

Limit switch(Code is H--2)



PNP Rotary encoder(Code is H--1)



Note 1: For controller the DC12~24V GK38-200 or GK38-360 Rotary encoder is preferred.

Dimension(mm) and Mounting(75mm*150mm)

