


Model and Description

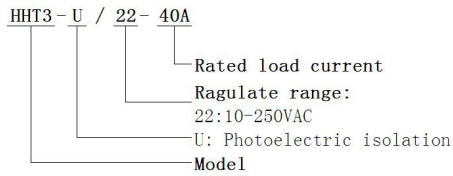

Specification

Dimension	106mm*75mm*31.5mm	
Model	HHT3-U/22 10-100A	
Description	Full-isolated Single phase Solid voltage regulator	
Control mode	0-5VDC, 0-10VDC, 4-20mA	
Load voltage	22VAC	
Regulate range	22: 10-250VAC	
Isolation voltage	Active type, full isolated	
Off-state leakage current	≤10mA	
Load current	10A, 20A, 30A, 40A, 100A	
Instant voltage	22: 600VAC	
On-state voltage drop	< 1.6VAC	
Dielectric strength	≥2000VAC	
Insulation resistance	500mΩ(500VDC testing)	
Ambient temperature	-30~80℃	
Indicate methods	LED	
Installation	Screw	
Remarks	If load current > 10A ,a radiator is necessary, Carbon-film potentiometer should be with insulation button and shell	
Packing	Inner box	1PCS/Paper box
	Outer box	30PCS
	CTN size	380mm*215mm*175mm
	Weight	10A≈390g, 1CTN/30PCS G.W: 13KG, N.W: 12KG 40A≈470g, 1CTN/30PCS G.W: 15.5KG, N.W: 14.5KG 100A≈540g, 1CTN/30PCS G.W: 17.5KG, N.W:16.5KG

Radiator (Optional)	HH060	HH061	HH062	HH063

Wiring Diagram

